

A

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

Niels Gebauer

Serial No.: Unknown

Filing Date: Herewith

For: COOL ICE AVAILABILITY MESSAGE

Docket No.: 33012/246/101

TRANSMITTAL SHEET

Assistant Commissioner for Patents
BOX PATENT APPLICATION
Washington, D.C. 20231

Sir:

<p>CERTIFICATE UNDER 37 C.F.R. 1.10: The undersigned hereby certifies that this paper or papers, as described herein, are being deposited in the United States Postal Service, "Express Mail Post Office to Addressee" having an Express Mail mailing label number of <u>EL008454373US</u>, in an envelope address to: Assistant Commissioner for Patents, Washington, D.C., 20231 on this <u>9th</u> day of <u>November</u>, 19 <u>98</u>.</p> <p>By: <u>Candace K. Murray</u> Candace K. Murray</p>
--

We are transmitting herewith the attached Patent Application including the following:

[XXXX] 38 sheet(s) of specification.

[XXXX] 5 sheet(s) of claim(s).

[XXXX] 1 sheet(s) of Abstract.

[XXXX] 11 sheet(s) of Formal drawings.

[XXXX] Executed Declaration and Power of Attorney.

[XXXX] An Assignment of the invention to Unisys Corporation is being filed contemporaneous with this patent application.

CLAIMS AS FILED						
	(1)	(2)	SMALL ENTITY		OTHER	
FOR:	# FILED	# EXTRA	Rate	Fee	Rate	Fee
BASIC FEE				\$395		\$790
TOTAL CLAIMS	20-20=	0	x11=	\$	x22=	\$
INDEPENDENT CLAIMS	4-3 =	1	x41=	\$	x82=	\$ 82
() MULTIPLE DEPENDENT CLAIM PRESENTED			+135=	\$	+270=	\$
TOTAL			\$		\$872.00	

*If the difference in Column (1) is less than zero, enter "0" in Column 2.

[] Other _____

[XXXX] Two checks in the amount of \$ 872.00 and \$ 40.00 are enclosed to cover Filing Fee and Assignment Fee, respectively.

[XXXX] Please charge any deficiencies or credit any over payment in the enclosed fees to Deposit Account 14-0620.

By: John L. Rooney
Reg. No. 28,898

John L. Rooney
NAWROCKI, ROONEY & SIVERTSON, P.A.
Suite 401, Broadway Place East
3433 Broadway Street N.E.
Minneapolis, Minnesota 55413
Telephone: (612) 331-1464
Facsimile: (612) 331-2239

COOL ICE AVAILABILITY MESSAGE

CROSS REFERENCE TO CO-PENDING APPLICATIONS

U.S. Patent Application No. _____, filed _____, and entitled, "A Common
6 Gateway Which Allows Applets to Make Program Calls to OLTP Applications Executing
on an Enterprise Server"; U.S. Patent Application No. _____, filed _____, and
entitled, "A Multi-Client User Customized DOM Gateway for an OLTP Enterprise
Server Application"; U.S. Patent Application No. _____, filed _____, and entitled,
"An Automated Development System for Developing Applications that Interface with
11 Both Distributed Component Object Model (DOM) and Enterprise Server
Environments"; U.S. Patent Application No. _____, filed _____, and entitled,
"Providing a Modular Gateway Architecture Which Isolates Attributes of the Client and
Server Systems into Independent Components"; U.S. Patent Application No. _____,
filed _____, and entitled, "Making CGI Variables and Cookie Information Available to
16 an OLTP System"; U.S. Patent Application No. _____, filed _____, and entitled, "A
Gateway for Dynamically Providing Web Site Status Information"; U.S. Patent
Application No. _____, filed _____, and entitled, "Development System for
Automatically Enabling a Server Application to Execute with an XATMI-complaint
transaction MGR :Managing Transactions within Multiple Environments"; U.S. Patent
21 Application No. _____, filed _____, and entitled, "Cool ICE Batch Interface"; U.S.
Patent Application No. _____, filed _____, and entitled, "Cool ICE Debug"; U.S.

BACKGROUND OF THE INVENTION

1. **Field of the Invention:** The present invention generally relates to data base management systems and more particularly relates to enhancements for providing access to data base management systems via internet user terminals.

6 2. **Description of the prior art:** Data base management systems are well known in the data processing art. Such commercial systems have been in general use for more than 20 years. One of the most successful data base management systems is available from Unisys Corporation and is called the Classic MAPPER® data base management system. The Classic MAPPER system can be reviewed using the Classic MAPPER User's Guide
11 which may be obtained from Unisys Corporation.

The Classic MAPPER system, which runs on proprietary hardware also available from Unisys Corporation, provides a way for clients to partition data bases into structures called filing cabinets and drawers, as a way to offer a more tangible format. The Mapper data base manager utilizes various predefined high-level instructions
16 whereby the data base user may manipulate the data base to generate human-readable data presentations called "reports". The user is permitted to prepare lists of the various predefined high-level instructions into data base manager programs called "Mapper Runs":. Thus, users of the Classic MAPPER system may create, modify, and add to a given data base and also generate periodic and aperiodic reports using various Mapper
21 Runs.

However, with the Classic MAPPER system, as well as with similar proprietary

1 data base management systems, the user must interface with the data base using a
terminal coupled directly to the proprietary system and must access and manipulate the
data using the Mapper Run command language of Classic MAPPER. Ordinarily, that
means that the user must either be co-located with the hardware which hosts the data
base management system or must be coupled to that hardware through dedicated
6 telephone, satellite, or other data links. Furthermore, the user usually needs to be
schooled in the command language of Classic MAPPER (or other proprietary data base
management system) to be capable of generating Mapper Runs.

Since the advent of large scale, dedicated, proprietary data base management
systems, the internet or world wide web has come into being. Unlike closed proprietary
11 data base management systems, the internet has become a world wide bulletin board,
permitting all to achieve nearly equal access using a wide variety of hardware, software,
and communication protocols. Even though some standardization has developed, one of
the important characteristics of the world wide web is its ability to constantly accept new
and emerging techniques within a global framework. Many current users of the internet
16 have utilized several generations of hardware and software from a wide variety of
suppliers from all over the world. It is not uncommon for current day young children to
have ready access to the world wide web and to have substantial experience in data
access using the internet.

Thus, the major advantage of the internet is its universality. Nearly anyone,
21 anywhere can become a user. That means that virtually all persons are potentially
internet users without the need for specialized training and/or proprietary hardware and

1 software. One can readily see that providing access to a proprietary data base
management system, such as Classic MAPPER, through the internet would yield an
extremely inexpensive and universally available means for accessing the data which it
contains and such access would be without the need for considerable specialized training.

There are several basic problems with permitting internet access to a proprietary
6 data base. The first is a matter of security. Because the internet is basically a means to
publish information, great care must be taken to avoid intentional or inadvertent access
to certain data by unauthorized internet users. In practice this is substantially
complicated by the need to provide various levels of authorization to internet users to
take full advantage of the technique. For example, one might have a first level involving
11 no special security features available to any internet user. A second level might be for
specific customers, whereas a third level might be authorized only for employees. One
or more fourth levels of security might be available for officers or others having
specialized data access needs.

Existing data base managers have security systems, of course. However, because
16 of the physical security with a proprietary system, a certain degree of security is inherent
in the limited access. On the other hand, access via the internet is virtually unlimited
which makes the security issue much more acute.

The second major problem is imposed by the internet protocol itself. One of the
characteristics of the internet which makes it so universal is that any single transaction in
21 HTML language combines a single transfer (or request) from a user coupled with a
single response from the internet server. In general, there is no means for linking

multiple transfers (or requests) and multiple responses. In this manner, the internet utilizes a transaction model which may be referred to as "stateless". This limitation ensures that the internet, its users, and its servers remain sufficiently independent during operation that no one entity or group of entities can unduly delay or "hang-up" the communications system or any of its major components. Each transmissions results in a termination of the transaction. Thus, there is no general purpose means to link data from one internet transaction to another, even though in certain specialized applications limited amounts of data may be coupled using "cookies" or via attaching data to a specific HTML screen.

However, some of the most powerful data base management functions or services of necessity rely on coupling data from one transaction to another in dialog fashion. In fact this linking is of the essence of Mapper Runs which assume change of state from one command language statement to the next. True statelessness from a first Mapper command to the next or subsequent Mapper command would preclude much of the power of Classic MAPPER (or any other modern data base management system) as a data base management tool and would eliminate data base management as we now know it.

A special problem related to the protocol is the inherent inability of the internet to describe the status of a requested resource. In general, the only information that the internet can determine from the unavailability of a requested resource is that the requested resource is unavailable. Ordinarily, this is accomplished by a simple time-out. However, if the requestor is provided no further information, it is unknown whether the

1 resource is unavailable because it is busy, unavailable because it is not functioning,
unavailable because it has been improperly addressed, unavailable because it does not
exist, etc. As a result, the user is given no help with regard to what should be done
concerning the unavailability of the requested resource.

For many internet transactions, this lack of information is acceptable, because
6 when making a resource request, the user is often searching for something without
knowing exactly what type of response to expect. Unavailability simply means to
continue the search elsewhere. However, users of existing proprietary data base
management systems need to be provided with further information, because they are
accustomed to utilizing a dedicated resource having defined and known characteristics.
11 They are not at liberty to simply search elsewhere. They need to know that they have
properly addressed an existing resource. If the resource is unavailable because it is busy
or has failed, they need to know when to try again.

SUMMARY OF THE INVENTION

The present invention overcomes the disadvantages of the prior art by providing a method of and apparatus for utilizing the power of a full featured data base management system by a user at a terminal coupled to the world wide web or internet. In order to permit any such access, the present invention must first provide a user interface, called a gateway, which translates transaction data transferred from the user over the internet in HTML format into a format from which data base management system commands and inputs may be generated. The gateway must also convert the data base management system responses and outputs into an HTML document for display on the user's internet terminal. Thus, as a minimum, the gateway must make these format and protocol conversions. In the preferred embodiment, the gateway resides in the web server coupled to the user via the world wide web and coupled to proprietary data base management system.

To make access to a proprietary data base by internet users practical, a sophisticated security system is required to prevent intentional or inadvertent unauthorized accesses. As discussed above, such a security system should provide multiple levels of access to accommodate a variety of authorized user categories. In the preferred embodiment of the present invention, several levels of data classification are provided and several classes of users are defined. This permits certain levels of data to be accessed by one or more of the several classes of user. The security system may either reside in the web server containing the gateway or may be an existing component

1 of the data base management system.

Whereas the gateway and the security system are the minimum necessary to permit the most rudimentary form of communication between the internet terminal of the user and the proprietary data base management system, as explained above, the internet is a "stateless" communication system; the addition of the gateway and the security system do not change this statelessness. To unleash the real power of the data base management system, the communication protocol between the data base and the user requires functional interaction between the various data transfers.

The present invention adds state management to this environment. Instead of considering each transfer from the internet user coupled with the corresponding server response as an isolated transaction event as defined by the world wide web, one or more related service requests may be functionally associated in a service request sequence as defined by the data base management system into a dialog.

A repository is established to store the state of the service request sequence. As such, the repository can store intermediate requests and responses, as well as other data associated with the service request sequence. Thus, the repository buffers commands, data, and intermediate products utilized in formatting subsequent data base management service requests and in formatting subsequent HTML pages to be displayed to the user.

The transaction data in HTML format received by the server from the user, along with the state information stored in the repository, are processed by a service handler into a sequence of service requests in the command language of the data base management system. Sequencing and control of the data base management system is via

an administration module.

Through the use of the repository to store the state of the service request sequence, the service handler to generate data base management command language, and the administration module , the world wide web user is capable of performing each and every data base management function available to any user, including a user from a proprietary terminal having a dedicated communication link which is co-located with the proprietary data base management system hardware and software. In addition, the data base management system user at the world wide web terminal is able to accomplish this in the HTML protocol, without extensive training concerning the command language of the data base management system.

Given that the gateway, security system, and service processing combine to provide the internet terminal with the full features of the existing proprietary data base management system, the data base management system client can conveniently access the data base from either an existing dedicated terminal or from an internet terminal. The preferred mode of the present invention provides an additional feature to make the usage comparable from either terminal. A message may be stored within the repository to notify potential users of the availability status of the data base management system. This message may be composed and/or modified by the administrator to provide the user with whatever information may be deemed appropriate in view of the unavailability.

The administrator creates a text file containing the desired message to be stored in the repository. An object is created whereby the service handler converts the text file to an HTML page and returns it to a requestor upon the occurrence of one or more

- 1 predetermined conditions. Typical conditions include, system maintenance precluding availability, extensive user queuing, and major data base updating.

BRIEF DESCRIPTION OF THE DRAWINGS

Other objects of the present invention and many of the attendant advantages of the present invention will be readily appreciated as the same becomes better understood by reference to the following detailed description when considered in connection with the accompanying drawings, in which like reference numerals designate like parts throughout the figures thereof and wherein:

FIG. 1 is pictographic view of the Cool ICE system coupled between a user on the world wide web and an existing proprietary data base management system;

Fig. 2 is a schematic drawing showing the operation of a multi-level security system in accordance with the preferred embodiment of the present invention;

Fig. 3 is a pictographic view of the hardware of the preferred embodiment;

Fig. 4 is a semi-schematic diagram of the operation of the Cool ICE system;

Fig. 5 is an overall schematic view of the software of the Cool ICE system;

Fig. 6 is a schematic view of a service request;

Fig. 7 shows a schematic view of a service request sequence;

Fig. 8 is a diagrammatic comparison between a dialog-based structure and a service-based structure;

Fig. 9 is a detailed diagram of the storage and utilization of state information within the repository;

Fig. 10 is a detailed diagram showing the preparation and usage of the availability message; and

1 **Fig. 11** is a view of a typical HTML page containing the availability message.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention is described in accordance with several preferred embodiments which are to be viewed as illustrative without being limiting. These several preferred embodiments are based upon Series 2200 hardware and operating systems, the Classic MAPPER data base management system, and the Cool ICE software components, all available from Unisys Corporation.

Fig. 1 is an overall pictographic representation of a system 10 permitting access to a proprietary data base management system via an internet terminal. Existing data bases and applications 12 represents commercially available hardware and software systems which typically provide select users with access to proprietary data and data base management functions. In the preferred embodiment, existing data bases and applications 12 represents Series 2200 hardware and operating system containing one or more data bases prepared using Classic MAPPER data base management system, all available from Unisys Corporation. Historically, existing data bases and applications 12 could only be accessed from a dedicated, direct terminal link, either physically co-located with the other system elements or connected thereto via a secured dedicated telephonic, satellite, or fiber optic link.

With the preferred mode of the present invention, communication between new web application terminal 14 and existing data bases and applications 12 is facilitated. As discussed above, this permits nearly universal access by users world wide without

1 specialized hardware and/or user training. The user effects the access using standardized
HTML transaction language through world wide web link 16 to the Cool ICE system 20,
which serves as a world wide web server to world wide web link 16.

Cool ICE system 20 appears to existing data bases and applications 12 as a data
base management system proprietary user terminal over dedicated link 18. Oftentimes,
6 dedicated link 18 is an intranet or other localized network link. Cool ICE system 20 is
currently available in commercial form without the present invention as Cool ICE
Revision Level 1.1 from Unisys Corporation.

Fig. 2 is a schematic diagram of security system 22 of the preferred mode of the present invention. By way of example, there are four categories of service defined, each with its own functionality and portion of the data base. Service A 36 contains data and functions which should only be made available to customers. Service B 38 contains data and functions which should only be made available to customers or employees. Service C 40 contains data and functions which should only be made available to employees, and Service D 42, containing the least restrictive data and functions may be made available to anyone, including the general public.

In a typical application, Service D 42 might contain the general home page information of the enterprise. It will consist of only the most public of information. It is likely to include the name, address, e-mail address, and phone number of the enterprise, along with the most public of the business details. Usually, Service D 42 would include means of presenting the information in a sufficiently interesting way to entice the most casual of the public user to make further inquiry and thus become more involved with the objectives of the enterprise. Service D 42 represents the lowest level of security with data and functions available to all.

Service C 40 is potentially the highest level of classification. It contains data and functions which can be made available only to employees. In actual practice, this might entail a number of sub levels corresponding to the various levels of authority of the various employees. However, some services may be so sensitive that the enterprise decides not to provide any access via the internet. This might include such things as

1 strategic planning data and tools, advanced financial predictions, specific information
regarding individual employees, marketing plans, etc. The penalty for this extreme
security measure is that even authorized individuals are prohibited from accessing these
services via the internet, and they must take the trouble to achieve access via an old-
fashioned dedicated link.

6 Customers and employees may share access to Service B 38. Nevertheless, these
data and functions are sufficiently sensitive that they are not made public. Service B 38
likely provides access to product specifications, delivery schedules and quantities, and
pricing.

11 For customer access only is Service A 36. One would expect marketing
information, along with specific account information, to be available here.

16 These four service levels (i.e., Service A 36, Service B 38, Service C 40, and
Service D 42) are regulated in accordance with three security profiles. The lowest level
of security does not require a security profile, because any member of the general public
may be granted access. This can be readily seen as guest category 28 (e.g., a member of
the public) can directly access Service D 42. Of course, all other categories of user may
also directly access Service D 42, because all members of the more restrictive categories
(e.g., customers and employees) are also members of the general public (i.e., the least
restrictive category).

21 Security Profile #1, 30 permits access to Service A 36 if and only if the requestor
seeking access is a customer and therefore a member of customer category 24. Members
of customer category 24 need to identify themselves with a customer identification code

1 in order to gain access. The assigning and processing of such identification codes are
well known to those of skill in the art.

Similarly, Security Profile #3, 34 permits access to Service C 40 if and only if the
requestor seeking access is an employee and therefore a member of employee category

26. Security Profile #2, 32 permits access to Service B 38 to requestors from either

6 customer category 24 or employee category 26, upon receipt of a customer identification
code or an employee identification code.

Fig. 3 is a pictorial diagram of hardware suite 44 of the preferred embodiment of the present invention. The client interfaces with the system via internet terminal 46. Preferably, internet terminal 46 is an industry compatible, personalized computer having a current version of the Windows operating system and suitable web browser, all being readily available commercial products. Internet terminal 46 communicates over world wide web access 48 using standardized HTML protocol.

The Cool ICE system is resident in web server 50, which is coupled to internet terminal 46 via world wide web access 48. In the preferred mode, web server 50 is owned and operated by the enterprise owning and controlling the proprietary data base management system. Web server 50 may serve as the internet access provider for internet terminal 46 wherein world wide web access 48 is typically a dial-up telephone line. This would ordinarily be the case if the shown client were an employee of the enterprise. On the other hand, web server 50 may be a remote server site on the internet if the shown client has a different internet access provider. This would ordinarily occur if the shown client were a customer or guest.

In addition to being coupled to world wide web access 48, web server 50, containing the Cool ICE system, is coupled to intranet 52 of the enterprise as shown. Intranet 52 provides the enterprise with communication for its internal business purposes. This communication is administered and managed by enterprise server 54 having enterprise server storage facility 56. Thus, employees and others granted access may communicate via intranet 52 within the physical security provided by the enterprise.

Also coupled to intranet 52 is departmental server 58 having departmental server storage facility 60. Additional departmental servers (not shown) may be coupled to intranet 52. The enterprise data and enterprise data base management service functionality typically resides within enterprise server 54, departmental server 58, and any other departmental servers (not shown). Normal operation in accordance with the prior art would provide access to this data and data base management functionality via intranet 52 to users directly coupled to intranet 52.

In the preferred mode of the present invention, access to this data and data base management functionality is also provided to users (e.g., internet terminal 46) not directly coupled to intranet 52, but indirectly coupled to intranet 52 via web server 50. As explained below in more detail, web server 50 provides this access utilizing the Cool ICE system resident in web server 50.

Fig. 4 is pictographic view of the system of Fig. 3 with particular detail showing the organization and operation of the Cool ICE system 62, which is resident in the web server (see also Fig. 3). In this view, the client accesses the data base management system within the enterprise via internet terminal 54 which is coupled to the web server 68 by world wide web path 66. Again, the internet terminal 54 is preferably an industry standard computer utilizing a commercially available web browser.

The basic request/response format of the Cool ICE system involves a "service" (defined in greater detail below) which is an object of the Cool ICE system. The service is a predefined operation or related sequence of operations which provide the client with a desired static or dynamic result. The services are categorized by the language in which they were developed. Whereas all services are developed with client-side scripting which is compatible with internet terminal 54 (e.g., HTML), the server-side scripting defines the service category. Native services utilize Cool ICE script for all server-side scripting. On the other hand, open services may have server-side scripting in a variety of common commercial languages including Jscript, VBScript, ActiveX controls, and HTML. Because native services are developed in the Cool ICE language, greater development flexibility and variety are available with this technique.

Web server 68 provides open server processor 70 for Active Server Pages (ASP's) which have been developed as open services and Default ASP processor 72 for native services. After the appropriate decoding (i.e., native or open service), a call to the corresponding Cool ICE object 74 is initiated as shown. The selected object is processed

1 by Cool ICE engine 76.

Repository 80 is a storage resource for long term storage of the Cool ICE objects and short term storage of the state of a particular service. Further details concerning repository 80 may be found by consulting the above referenced, commonly-assigned, co-
6 pending U.S. Patent Application. In the preferred mode of the present invention, the objects stored in repository 80 are typically very similar to mapper runs as described above. For a more detailed description of mapper runs, Classic MAPPER User Manual is available from Unisys Corporation and incorporated herein by reference. In the more general case, repository 80 would typically store predefined sequences of statements in the command language of the enterprise data base management system(s) to be accessed.

11 Cool ICE engine 76 sequences these previously stored command statements and uses them to communicate via intranet 84 with the data base management system(s) (e.g., Classic Mapper) resident on enterprise server 86 and departmental server 88. The short term storage capability of repository 80 is utilized by Cool ICE engine 76 to store the state and intermediate products of each service until the processing sequence has
16 been completed. Following completion, Cool ICE engine 76 retrieves the intermediate products from repository 80 and formats the output response to the client, which is transferred to internet terminal 54 via web server 68 and world wide web path 66.

Cool ICE Administrator 82 is available for coordination of the operation of Cool ICE system 62 and thus can resolve conflicts, set run-time priorities, deal with security
21 issues, and serve as a developmental resource. Availability messages in accordance with the preferred mode of the present invention are prepared and/or modified via Cool ICE

1 Administrator 82. Graphing engine 78 is available to efficiently provide graphical
representations of data to be a part of the response of a service. This tends to be a
particularly useful utility, because many of the existing data base management systems
have relatively sparse resources for graphical presentation of data.

The combination of Cool ICE engine 76 and repository 80 permits a rather
6 simplistic service request from internet terminal 54 in dialog format to initiate a rather
complex series of data base management system functions. In doing so, Cool ICE engine
76 emulates an intranet user of the data base management system(s) resident on
enterprise server 86 and/or departmental server 88. This emulation is only made
possible, because repository 80 stores sequences of command language statements (i.e.,
11 the logic of the service request) and intermediate products (i.e., the state of the service
request). It is these functions which are not available in ordinary dialog on the world
wide web and are therefore not even defined in that environment.

Fig. 5 is a schematic diagram 90 of the software components of the Cool ICE system and the software components to which it interfaces in the preferred mode of the present invention. The client user of the Cool ICE system interfaces directly with web browser 92 which is resident on internet terminal 54 (see also Fig. 4). Web browser 92 is a commercially available browser operating under a current version of the Windows operating system (e.g., Windows 95). The only special requirement of web browser 92 is that it be capable of supporting frames.

Web browser 92 communicates with web server software 96 via internet standard protocol using HTML language using world wide web path 94. Web server software 96 is also commercially available software, which is, of course, appropriate for to the web server host hardware configuration. In the preferred mode of the present invention, web server software 96 is hosted on a Series 2200 mainframe available from Unisys Corporation, from which web server software 96 is readily available.

Cool ICE system software 98 consists of Cool ICE Gateway 100, Cool ICE service handler 102, Cool ICE administration 104, Cool ICE repository 106, and Cool ICE scripting 108. It is these five software modules which interface to web server software 96 in HTML using a dialog format and interface to data base management system interconnect 110 in the command language of the enterprise data base management system(s) (i.e., Classic MAPPER in the preferred mode of the present invention).

Cool ICE gateway 100 is the interface between standard, commercially available, web server software 96 and the internal Cool ICE system language and logic. As such,

1 Cool ICE gateway 100 translates the dialog format, incoming HTML service request into internal Cool ICE language. and protocol. Intrinsic in this translation is a determination of the serve category (see also Fig. 4) -- that is whether the service request is a native service (i.e., with Cool ICE server-side scripting) or an open service (i.e., with server-side scripting in another commercial language).

6 The service request, received from Cool ICE gateway 100, is utilized by Cool ICE service handler 102 to request the corresponding object from Cool ICE repository 106 and to open temporary state storage using Cool ICE repository 106. Cool ICE scripting 108 is called to translate the server-side scripting of an open service request as necessary. Cool ICE service handler 102 sequences through the command language statements of the object received from Cool ICE repository 106 and forwards each command in turn to data base management system software 114 for accessing of the enterprise proprietary data base management system. Cool ICE service handler 102 receives each of the intermediate products from data base management system software 114 and transfers each to Cool ICE repository 106 for temporary storage until completion of the service request. Cool ICE service handler 102 retrieves the intermediate products from Cool ICE repository 106 upon completion of the service request and formulates the Cool ICE response for transfer to browser 92 via web server software 96 and world wide web path 94.

21 Cool ICE administration 104 implements automatic and manual control of the process. It provides for record keeping, for resolution of certain security issues, and for development of further Cool ICE objects. The script providing for creation and

1 modification of the availability message is contained within Cool ICE administration 104.
This script creates a text file and performs any desired edits on the text contained
therein. Interconnect 110 and interconnect 112 are software interface modules for
communicating over the enterprise intranet (see also Fig. 4). These modules are
dependent upon the remaining proprietary hardware and software elements coupled to
6 the enterprise intranet system. In the preferred mode of the present invention, these are
commercially available from Unisys Corporation.

Fig. 6 is a schematic diagram 116 showing the processing of a service request by the Cool ICE system. Screen 118 is the view as seen by the client or user at an internet terminal (see also Fig., 4). This screen is produced by the commercially available browser 120 selected by the user. Any such industry standard browser is suitable, if it has the capability to handle frames. The language of screen 118 is HTML 124. Hyperlinks 126 is used in locating the URL of the Cool ICE resident server. In many instances, this will simply be the internet access provider of the internet terminal, as when the internet terminal is owned by the enterprise and the user is an employee. However, when the user is not an employee and the internet terminal is not necessarily owned by the enterprise, it becomes more likely that hyperlinks 126 identifies a remotely located server.

Icon 122 is a means of expressly identifying a particular service request. Such use of an icon is deemed to be unique. Additional detail concerning this use of an icon is available in the above identified, commonly assigned, co-pending U.S. Patent application. Window area 128 provides for the entry of any necessary or helpful input parameters. Not shown are possible prompts for entry of this data, which may be defined at the time of service request development. Submit button provides the user with a convenient means to transmit the service request to the web server in which the Cool ICE system is resident.

Upon "clicking on" submit button 130, screen 118 is transmitted to web server 136 via world wide web path 132. As discussed above, world wide web path 132 may be a

1 telephonic dial-up of web server 136 or it might be a long and complex path along the
internet if web server 136 is remote from the originating internet terminal. Web server
136 is the software which performs the retrieval of screen 118 from world wide web path
132.

Screen 118 is transferred from web server 136 to Cool ICE gateway 138, wherein
6 it is converted to the internal Cool ICE protocol and language. A browser input file is
opened at storage resource 146 via path 140. Thus the initial service request can be
accessed from storage resource 146 during processing up until the final result is
transferred back to the user. This access readily permits multi-step and iterative service
request processing, even though the service request was transferred as a single internet
11 dialog element. This storage technique also provides initially received input parameters
to later steps in the processing of the service request.

Cool ICE gateway 138 notifies Cool ICE service handler 156 that a service
request has been received and logged in. The service request itself is utilized by Cool
ICE service handler 156 to retrieve a previously stored sequence of data base
16 management system command statements from repository 166. Thus, in the general
case, a single service request will result in the execution of a number of ordered data
base management system commands. The exact sequence of these commands is defined
by the service request developer as explained in more detail below.

Service input parameters 170 is prepared from the service request itself and from
21 the command sequence stored in repository 166 as shown by path 164. This list of input
parameters is actually stored in a dedicated portion of repository 166 awaiting processing

of the service request.

Each command statement from repository 166 identified with the service request is sequentially presented to Cool ICE service 168 for processing via path 160. The corresponding input parameter from service input parameters 170 is coupled with each command statement via path 176 to produce an appropriate query of the enterprise data base management system at Cool ICE service 168. After the enterprise data base management system has responded to a given query, the intermediate products are stored as entries in HTML document 172 which is also stored in a dedicated portion of repository 166.

After all command statements corresponding to the service request have been processed by the enterprise data base management system and HTML document 172 has been completed, the result is provided via path 156 to Cool ICE service handler 156 for temporary storage as a browser output file in storage resource 154 via path 152. Cool ICE gateway 138 receives the browser output file via path 148. The response is converted to HTML protocol and transferred by web server 136 and world wide web path 134 to be presented to the user as a modified screen (not shown).

1

Fig. 7 is a pictographic drawing 178 of the development process for creating a Cool ICE service. HTML document 180 is created utilizing any commercially available standard HTML authoring tool (e.g., Microsoft FrontPage). The resulting HTML document 180 is stored as a normal .HTM file. This file will be utilized as a template of the service to be developed.

6

The authoring process moves along path 182 to invoke the administration module of the Cool ICE system at element 184. The new dynamic service is created using HTML document 180 stored as a normal .HTM file as a template. As HTML document 180 is imported into Cool ICE, sequences of script for the beginning and end of the HTML code are automatically appended to the service. Required images, if any, are also uploaded onto the web server (see also Figs. 5 and 6). The service is edited by inserting additional Cool ICE script, as required. A more detailed description of the editing process may be found in Cool ICE User's Guide, Revision 1.1, available from Unisys Corporation and incorporated herein by reference.

COOL ICE SYSTEM

16

The completed service script is transferred along path 186 to element 188 for storage. The service is stored as an object in the repository (see also Figs. 5 and 6). Storage is effected within the appropriate category 190 as discussed above, along with services 192, 194, and 196 within the same category.

21

The process proceeds along path 198 to element 200 for testing. To perform the testing, the URL for the newly created service is entered into the browser of the internet terminal, if known. The typical URL is as follows:

1 http://machine-name/ICEGate/Category/Service

If the URL for the new service is not known, a list of the available services may be determined from the Cool ICE system by specifying the Cool ICE URL as follows:

 http://machine-name/ICEGate

This call will result in a presentation of a menu containing the defined categories.

6 Selecting a category from the list will result in a menu for the services defined within that category. The desired service can thus be selected for testing. Selection of the service by either means will result in presentation of the HTML page as shown at element 200.

 The process proceeds to element 204 via path 202, wherein the HTML page may be enhanced. This is accomplished by exporting the HTML document from the Cool ICE administration module to a directory for modification. By proceeding back to HTML document 180 via path 208, the exported HTML template is available for modification using a standard HTML authoring tool. After satisfactory completion, the finished HTML document is saved for future use.

Fig. 8 is a diagram showing a comparison between dialog-based structure 210 and service-based structure 212. Dialog-based structure 210 is the norm for the typical existing proprietary data base management system (e.g., Classic MAPPER). The user, normally sitting at a dedicated user terminal, transfers output screen 214 to the data base management system to request a service. The user terminal and its normally dedicated link are suspended at element 216 to permit transfer and operation of the data base management system. The input is validated at element 218, while the user terminal and its normally dedicated link remains suspended.

The data base management system processes the service request at element 220 while the user terminal remains suspended. Output occurs at element 222 thereby releasing the suspension of the user terminal. Thus, a true dialog is effected, because one part of the dialog pair (i.e., the user terminal) is suspended awaiting response from the data base management system. This type of dialog is best accomplished in an environment wherein at least the user terminal (or data base management system) is dedicated to the dialog, along with the link between user terminal and data base management system.

Service-based structure 212 illustrates on of the basic constraints of the world wide web protocol. To ensure that each of the elements on the world wide web are sufficiently independent to prevent one element from unduly delaying or "hanging-up" another element to which it is coupled awaiting a response, the communication protocol forces a termination after each transmission. As can be readily seen, even the simplest

1 dialog requires at least separate and independent transactions or services. The first
service, Service 224, involves the transmissions of output form 228 from the internet user
terminal. This transmission is immediately and automatically followed by termination
230 to ensure independence of the sender and receiver.

The second service, Service 226, enables the receiver of output form 228 to
6 process the request and output an appropriate response. The validation of the input at
element 232, processing 234, and output 236 all occur within the receiver of output form
228. Immediately and automatically, termination 238 follows. Thus, if internet
transactions are to be linked into a true dialog to permit data base management
functions, the state must be saved from one service to the next as taught herein.

In the preferred mode of the present invention, the state of a service is saved in
the repository (see also Figs. 4 and 5) for use in the next or subsequent services.

Fig. 9 is a schematic diagram 240 of the preferred mode of the present invention showing normal data flow during operation, with special attention to the state saving feature. Work station 242 is an industry compatible personal computer operating under a commonly available operating system such as Windows 95. Browser 244 is a standard, commercially available web browser having frames capability. Path 248 is the normal world wide web path between work station 242 and web server 254 for the transfer of service requests and input data. These transfers are converted by Cool ICE gateway 256 as explained above and sent to Cool ICE service handler 258 via path 266 for disposition.,

The service request for data and/or another function is converted into the data base management language by reference to the service definition portion of repository 262 through reference along path 276. The actual command language of the data base management system is utilized over path 286 to access data base 264. The resultant data from data base 264 is transferred to Cool ICE administrator 290 via path 288. State manager 260 determines whether the original service request requires additional queries to data base 264 for completion of the dialog. If yes, the resultant data just received from data base 264 is transferred via path 284 to repository 262 for temporary storage, and the next query is initiated over path 286, and the process is repeated. This is the state saving pathway which is required to provide the user of the Cool ICE system to function in a dialog form over the world wide web.

Upon receipt of the resultant data from the final query of data base 264, state

1 manager 260 determines that the service request is now complete. State manager 260
 notifies repository 262 via path 280, and the intermediate products are retrieved from
 temporary storage in repository 262 via path 278 and supplied to Cool ICE service
 handler 258 via path 272 for formatting. State manager 260 then clears the intermediate
 products from temporary storage in repository 262 via path 282. The final response to
 6 the service request is sent to Cool ICE gateway 256 via path 270 for translation and to
 browser 244 via path 250.

Fig. 10 is a detailed diagram of the Cool ICE system showing presentation of the availability message in accordance with the preferred mode of the present invention. In the example presented, a user at work station 242 operating within commercially available browser 244, makes a service request by transferring an appropriate HTML page via path 246 to local web server 250.

The service request is presented to Cool ICE gateway 256 within Cool ICE system 252. After conversion as discussed above, the service request is presented to Cool ICE service handler 294 via path 292. Cool ICE service handler 294 requests status of Cool ICE system 252 from system settings 300 of Cool ICE administrator 304 via path 396. In accordance with the present example, Cool ICE system 252 is not available to honor service requests because of a maintenance condition. Therefore, Cool ICE administrator 304 accesses repository 308 for the previously created object which transfers the unavailability message to the user. The access is via path 302 to message 306, the storage area within repository 308, which maintains the unavailability message object.

The object thus accessed is transferred to Cool ICE service handler 294 via path 298 for execution. Cool ICE handler 294 prepares the HTML display page containing the unavailability message which is sent to Cool ICE gateway 256 via path 290. After conversion as described above, the unavailability message is transferred via path 248 to work station 242 for presentation to the user.

Fig. 11 is a view of typical HTML display page 310 containing an unavailability message. Buttons 312, 314, and 316 are self-explanatory to those of skill in the art.

Message 318 is prepared in accordance with the preparation of any Cool ICE objects as discussed in detail in the above identified, commonly assigned, co-pending application.

- 6 Message 318 may be static, or it may contain a variable such as shown at reference 320 which provides for the display of an availability time/date.

Having thus described the preferred embodiments of the present invention, those of skill in the art will be readily able to adapt the teachings found herein to yet other embodiments within the scope of the claims hereto attached.

WE CLAIM:

CLAIMS

1. In a data processing environment having a user terminal coupled to a publicly accessible digital communications network and having a data base management system with, the improvement comprising:

server responsively coupled to said user terminal via said publicly accessible digital communications network and responsively coupled to said data base management system wherein said server includes an administrator which optionally transfers an unavailability message to said user terminal.

2. The improvement according to claim 1 wherein said state manager includes a repository for storing said unavailability message.

3. The improvement according to claim 2 wherein said publicly accessible digital communications network is the world wide web.

4. The improvement according to claim 3 wherein said repository includes space for storage of at least one variable for said unavailability message.

5. The improvement according to claim 4 wherein said data base management system is Classic MAPPER.

0918946-1099
SECRET

- 1 6. An apparatus comprising:
- a. a user terminal;
 - b. a publicly accessible digital communications network coupled to said user terminal;
 - c. a server responsively coupled to said user terminal via said publicly accessible
 - 6 digital communications network;
 - d. a data base management system responsively coupled to said server; and
 - e. an administrator responsively coupled to said data base management system and said server for transferring an unavailability message from said server to said user terminal to indicate unavailability of said data base management system.
- 11 7. The apparatus of claim 6 wherein said data base management system has a repository having storage for said unavailability message.
- 16 8. The apparatus of claim 7 wherein said repository has storage for a variable to be included in said unavailability message.
9. The apparatus of claim 8 wherein said publicly accessible digital communications network is the world wide web.
- 21 10. The apparatus of claim 9 wherein said user terminal is an industry compatible personal computer having a commercially available web browser.

- h. transferring an unavailability message to said user terminal if said determining step determines that said data base management system is not currently capable of honoring said service request.

13. A method according to claim 12 wherein said transferring step further comprises adding an appropriate variable to said unavailability message.

41

1 15. A method according to claim 14 wherein said data base management system further comprises Classic MAPPER data base management system.

16. An apparatus comprising:

a. means for permitting a user to interact with a digital data base;

6 b. means responsively coupled to said permitting means for providing said user with access to a publicly accessible digital communication network via service-based requests;

c. means responsively coupled to said permitting means for offering data processing services according to dialog-based requests; and

11 e. means responsively coupled to said offering means and said permitting means for notifying said user terminal of the unavailability of said offering means.

17. An apparatus according to claim 16 wherein said publicly accessible digital communication network further comprises the world wide web.


18. An apparatus according to claim 17 wherein said offering means further comprises means for storing a predefined unavailability message.

19. An apparatus according to claim 18 wherein said offering means further comprises
21 Classic MAPPER data base management system.

- 1 20. An apparatus according to claim 19 wherein said permitting means further comprises
an industry standard personal computer.

ABSTRACT OF THE DISCLOSURE

6 An apparatus for and method of utilizing an internet terminal coupled to the world wide web to access an existing proprietary data base management system having a dialog-based request format. The user request is received by a web server from the world wide web and converted into one or more sequenced data base management commands. These data base management commands are sequentially presented to the data base management system and the intermediate products stored. After all of the sequenced data base management commands have been executed, the web server combines the intermediate products to form a complete response to the initial user request. The response is transferred to the user over the world wide web. However, should the data base management system be unavailable to honor the service request of a user, an unavailability message is transferred from the data base management system indicating the unavailability.

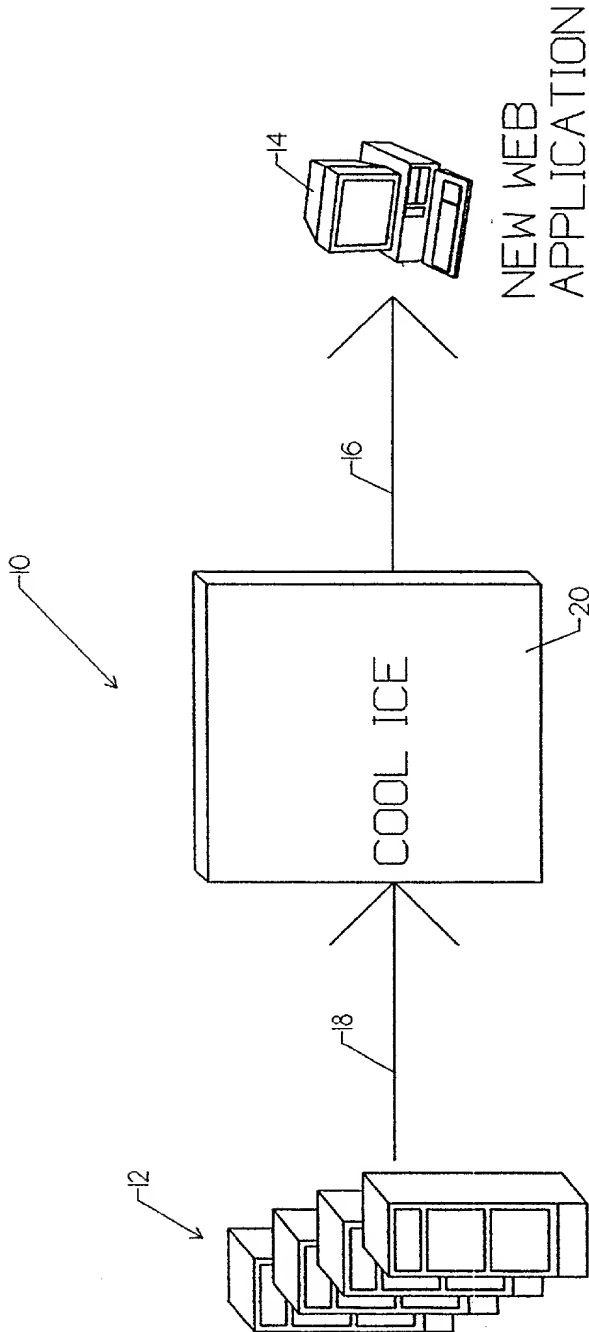

EXISTING
DATABASES AND
APPLICATIONS

FIG. 1

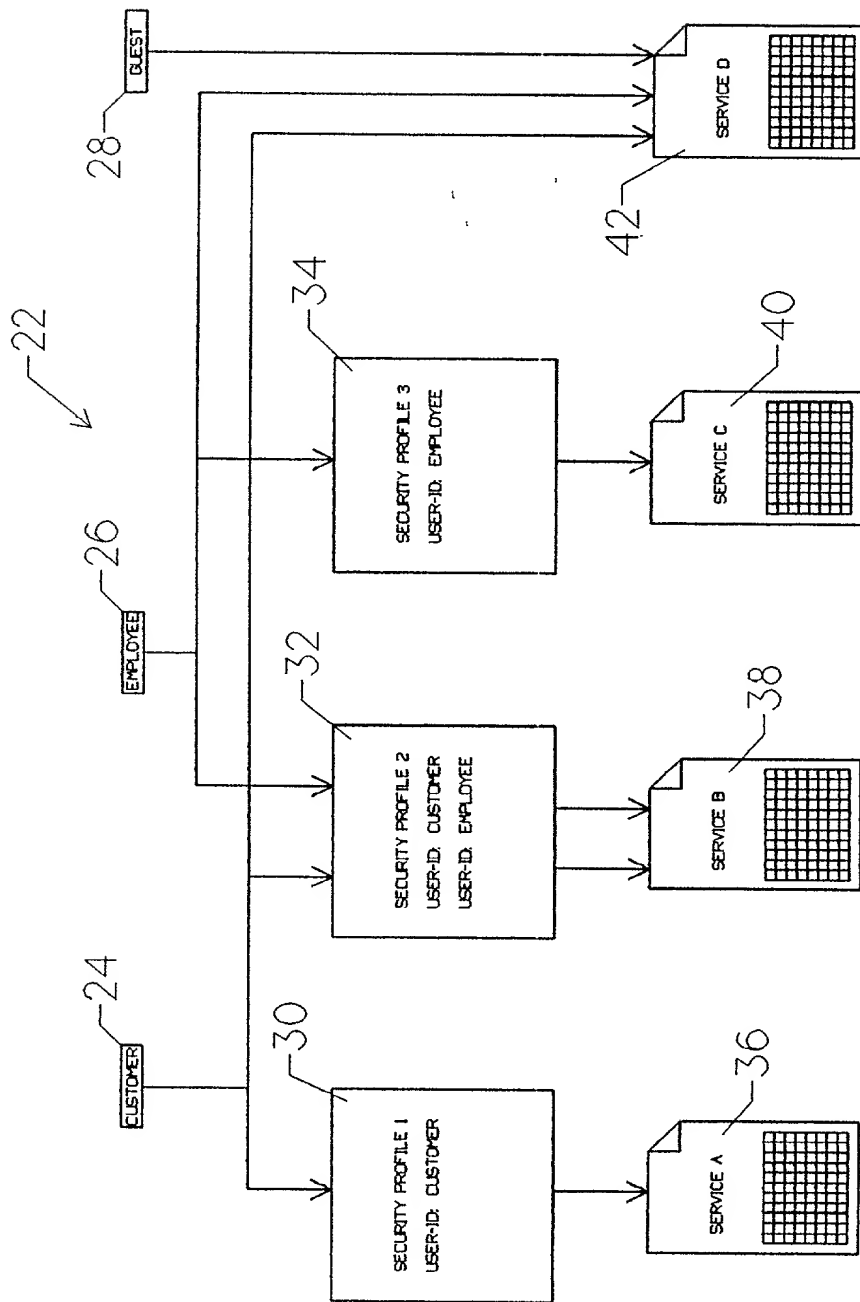


FIG. 2

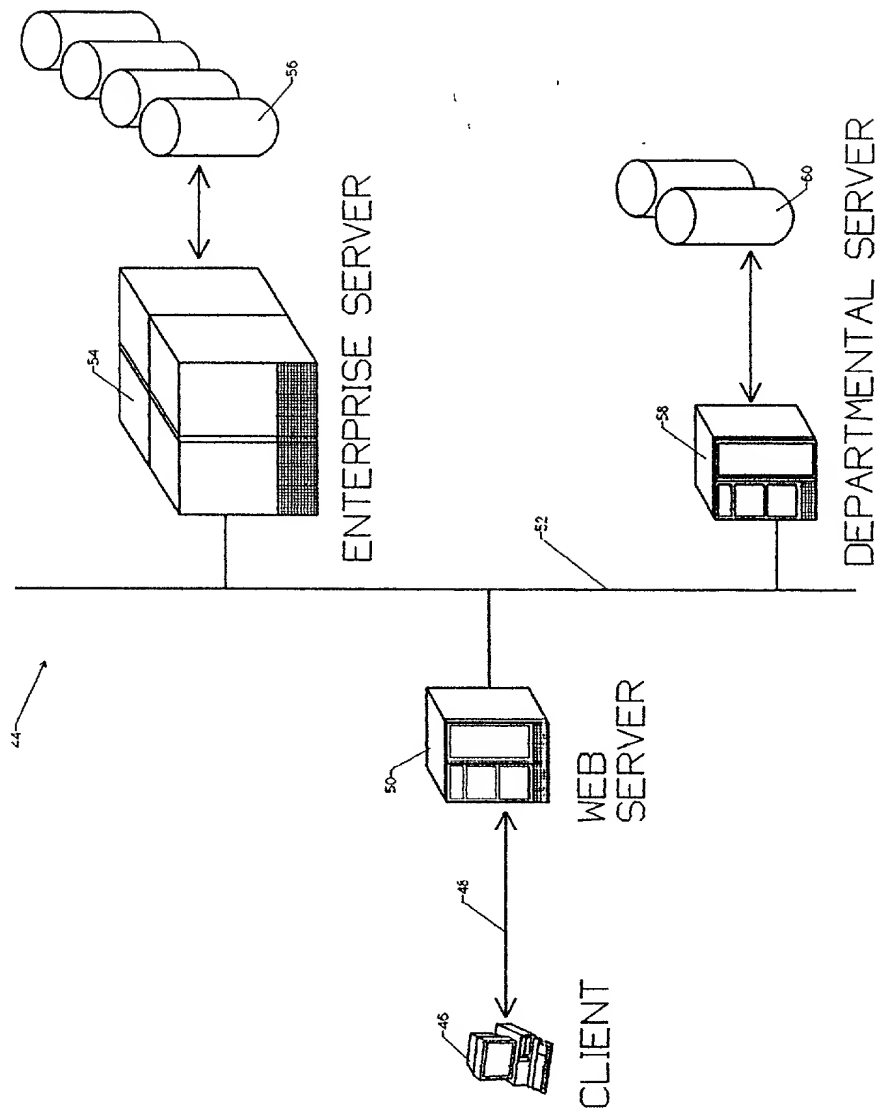


FIG. 3

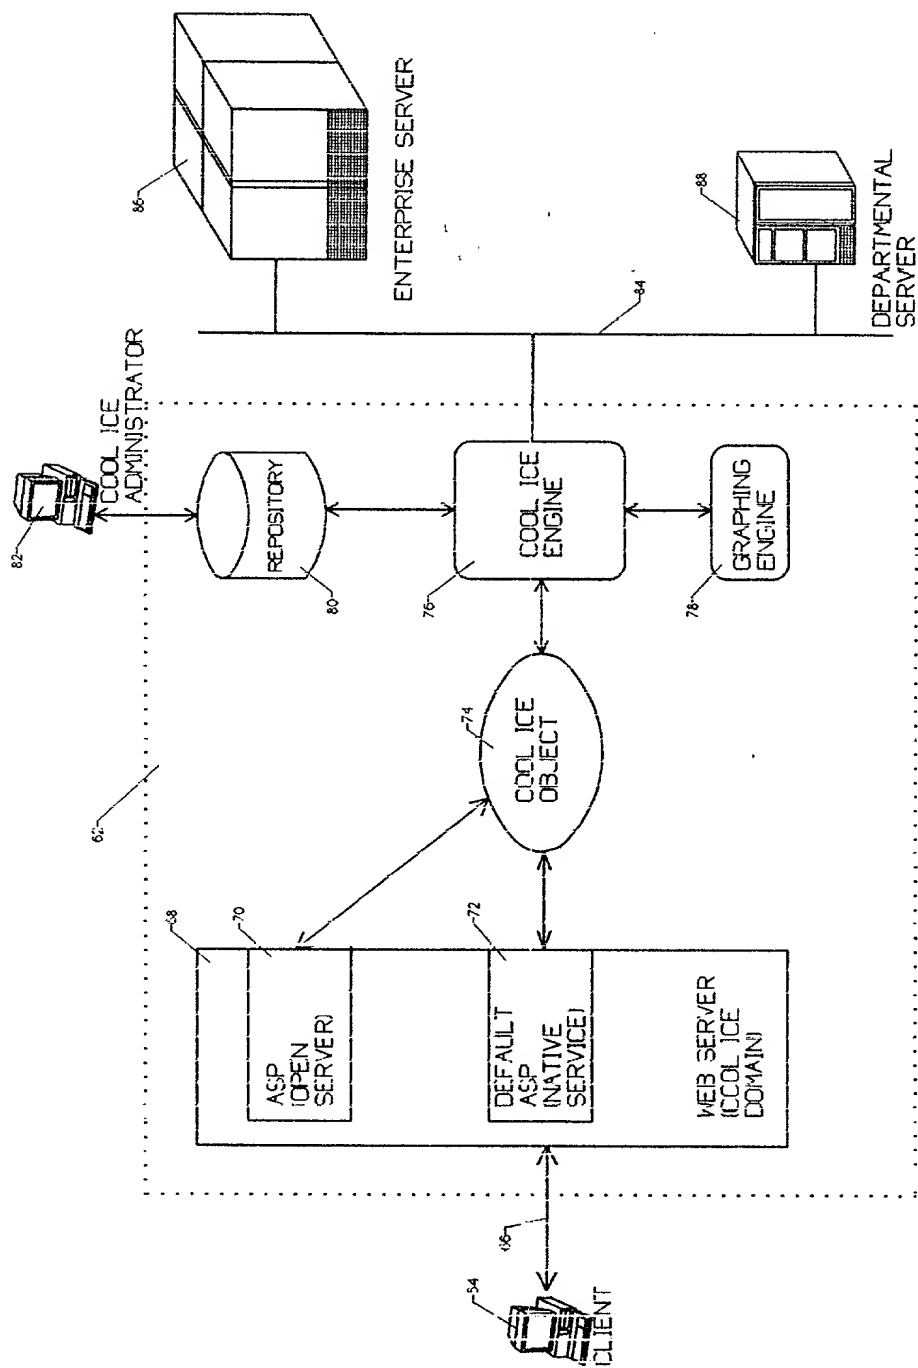


FIG. 4

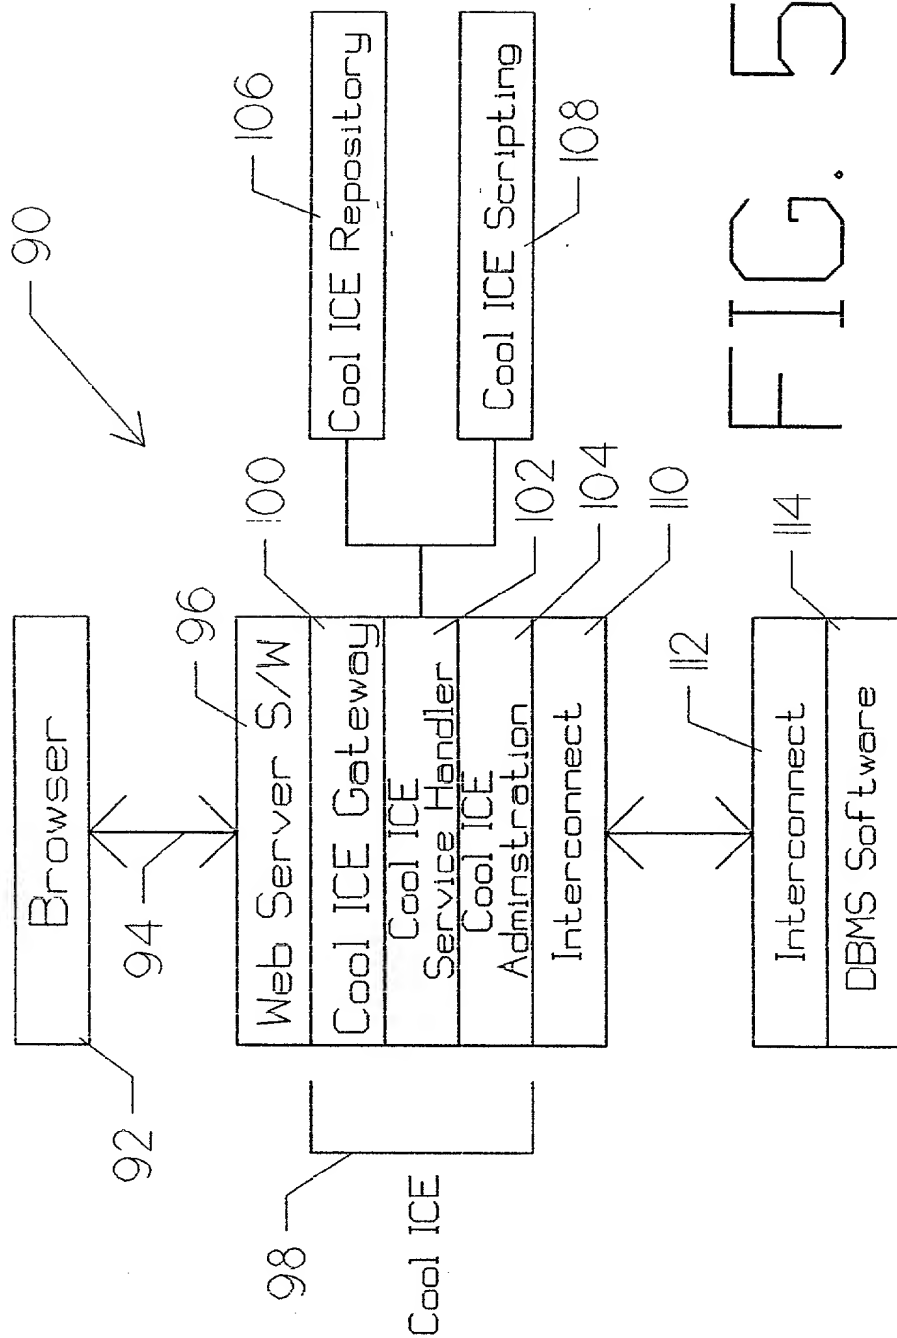


FIG. 5

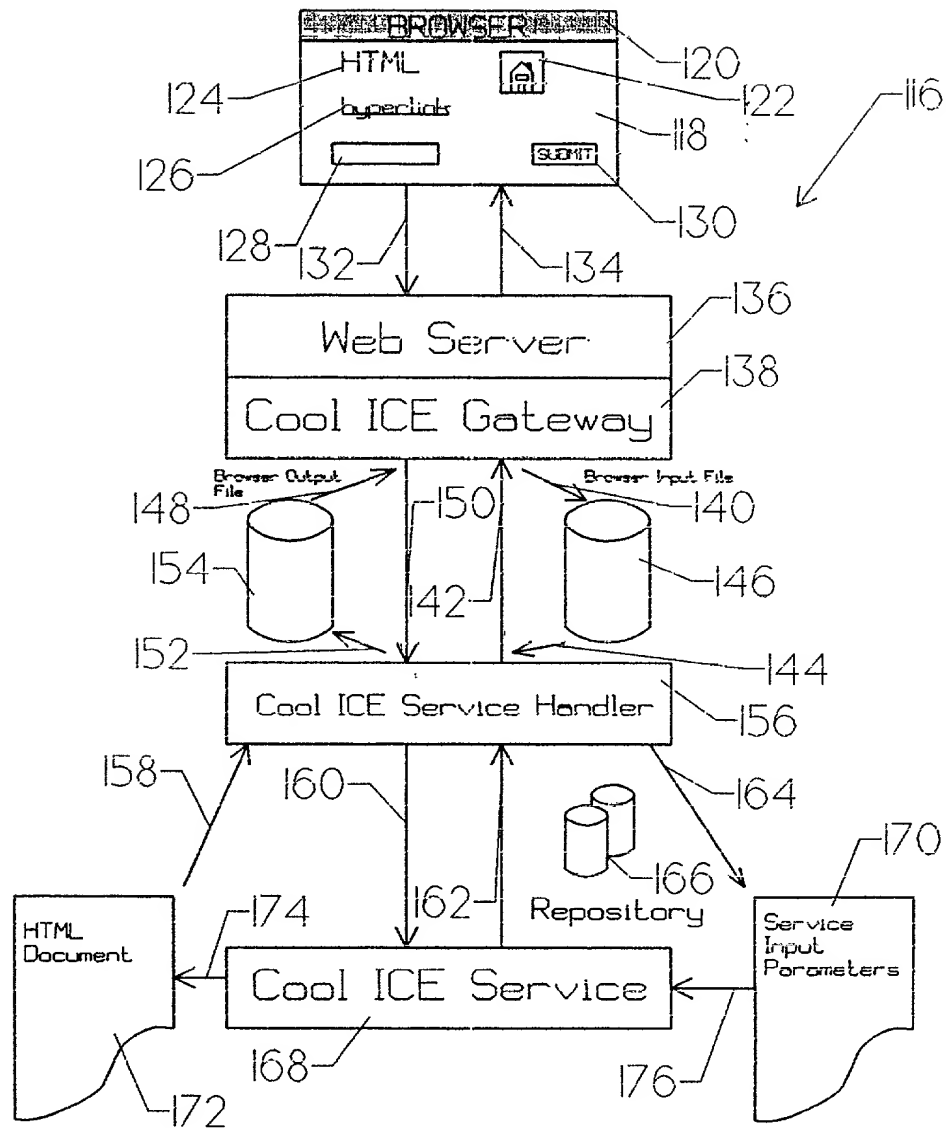


FIG. 6

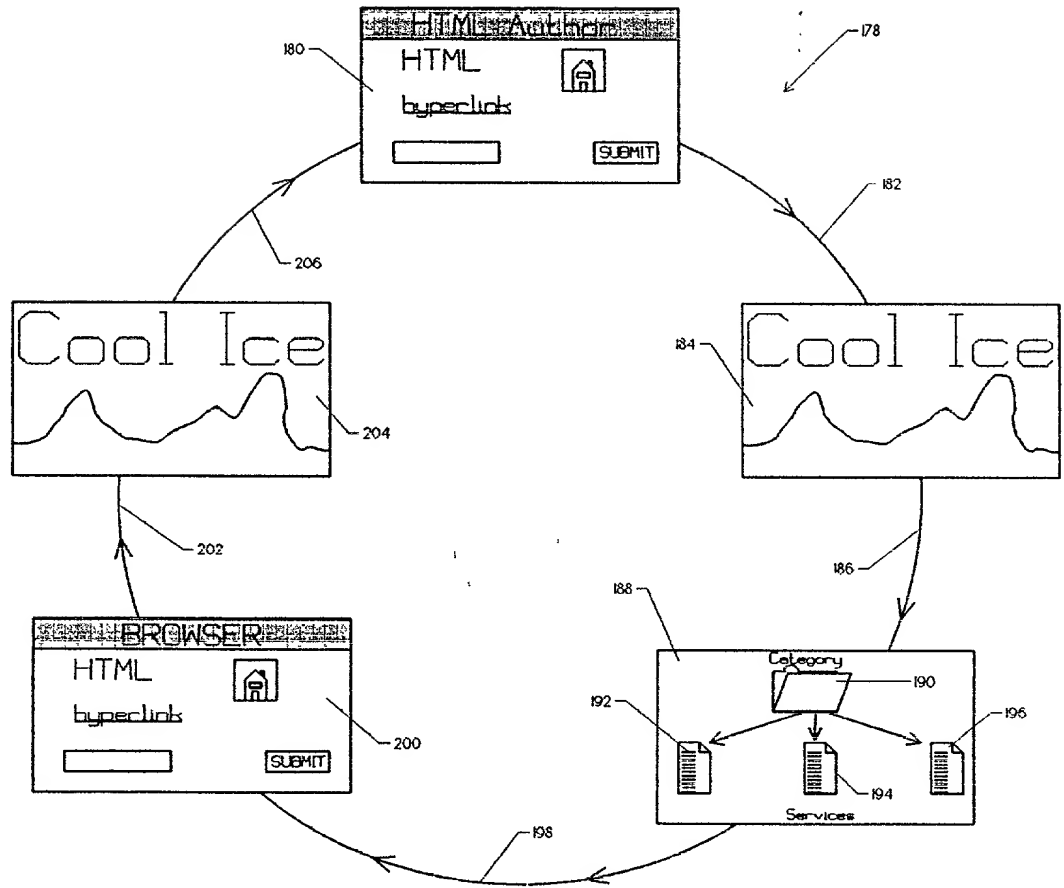


FIG. 7

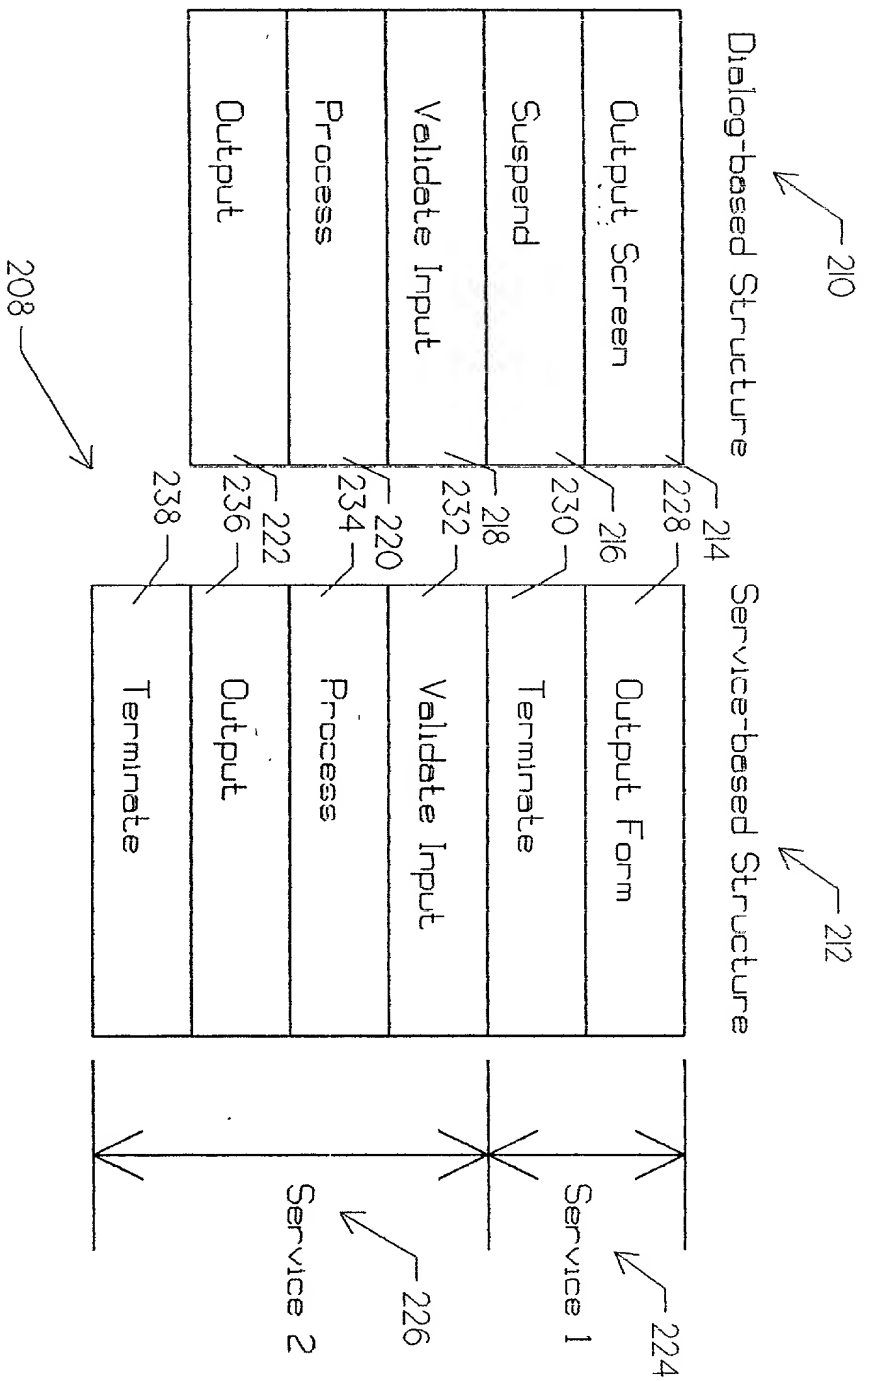


FIG. 8

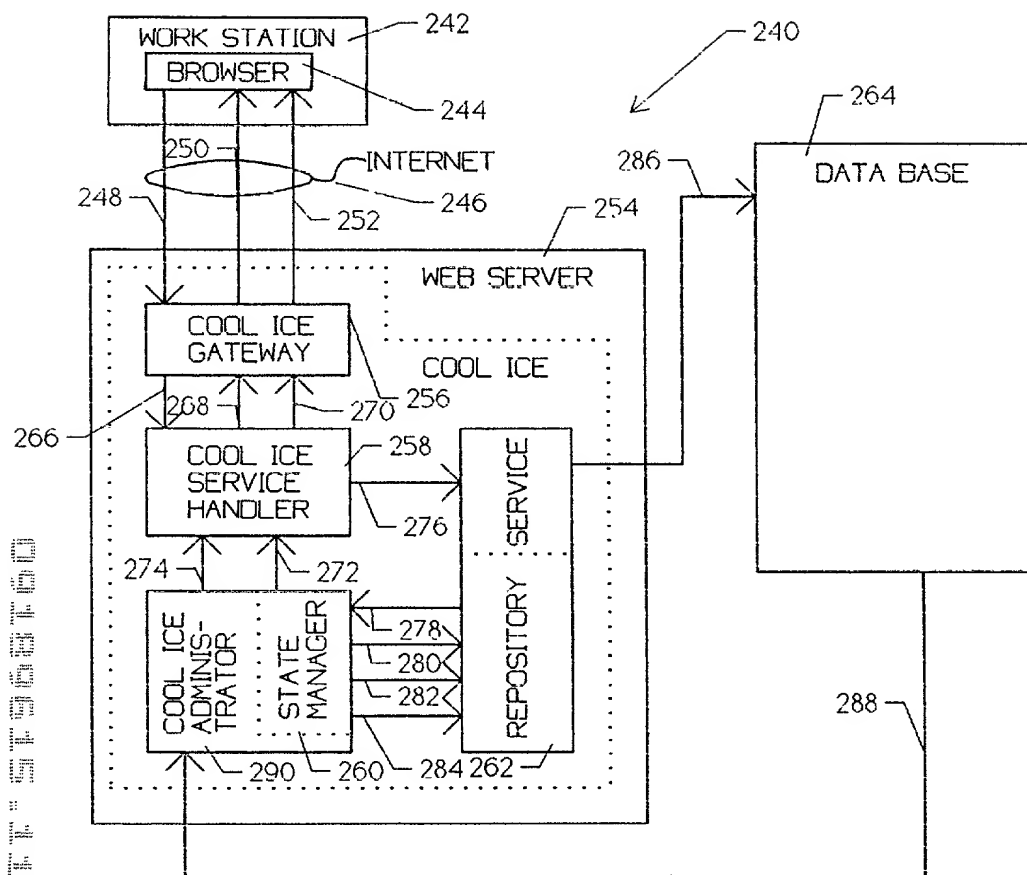


FIG. 9

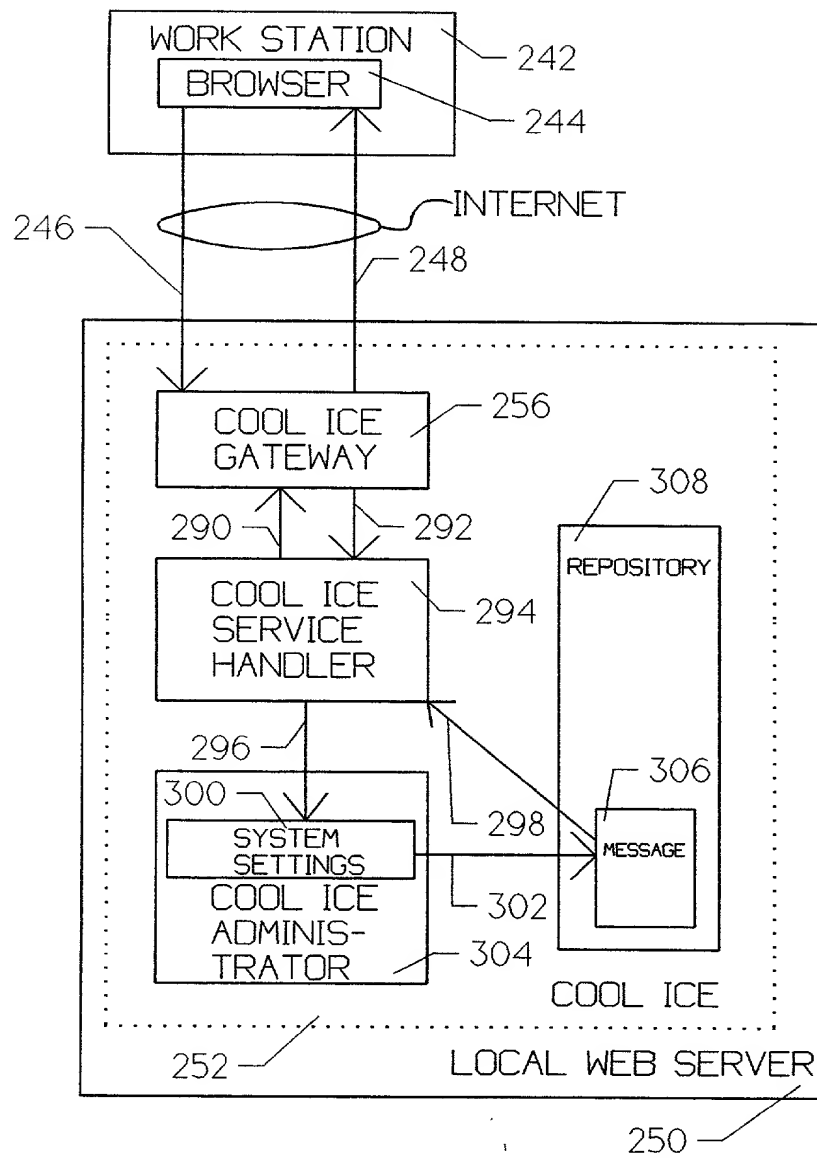


FIG. 10

FIG. 11

COMBINED DECLARATION/POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled COOL ICE AVAILABILITY MESSAGE the specification of which (check one)

XX is attached hereto

_____ was filed on _____
as U.S. Application
Serial No. _____

_____ and was amended on (if
applicable) _____

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefit(s) under Title 35, United States Code §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application(s) for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			Priority Claimed	
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	_____ YES	_____ NO
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	_____ YES	_____ NO
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	_____ YES	_____ NO

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

_____ (Serial No.)	_____ (Filing Date)	_____ (Status) (patented, pending, abandoned)
_____ (Serial No.)	_____ (Filing Date)	_____ (Status) (patented, pending, abandoned)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

John L. Rooney, Reg. No. 28,898
Lawrence M. Nawrocki, Reg. No. 29,333
Wayne A. Sivertson, Reg. No. 25,645
Charles A. Johnson, Reg. No. 20,852
Beth L. McMahon, Reg. No. P41,987
Donald A. Jacobson, Reg. No. 22,308

Send correspondence to:

Charles A. Johnson
UNISYS CORPORATION
P.O. Box 64942
MS 4772
St. Paul, MN 55164
(651) 635-7702

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon, I further declare that I understand the content of this declaration.

Full name of sole or first inventor Niels Gebauer

Inventor's Signature N. Gebauer Date 24/10-98

Residence New South Wales, Australia Citizenship Danish

Post Office Address 8/86 Milson Road, Cremorne, New South Wales, Australia 2090

Full name of second inventor _____

Inventor's Signature _____ Date _____

Residence _____ Citizenship _____

Post Office Address _____

Full name of third inventor _____

Inventor's Signature _____ Date _____

Residence _____ Citizenship _____

Post Office Address _____

20040904 140000

1.56 Duty to disclose information material to patentability.

(a) A patent by its very nature is affected with a public interest. The public interest is best served, and the most effective patent examination occurs when, at the time an application is being examined, the Office is aware of and evaluates the teachings of all information material to patentability. Each individual associated with the filing and prosecution of a patent application has a duty of candor and good faith in dealing with the Office, which includes a duty to disclose to the Office all information known to that individual to be material to patentability as defined in this section. The duty to disclose information exists with respect to each pending claim until the claim is cancelled or withdrawn from consideration, or the application becomes abandoned. Information material to the patentability of a claim that is cancelled or withdrawn from consideration need not be submitted if the information is not material to the patentability of any claim remaining under consideration in the application. There is no duty to submit information which is not material to the patentability of any existing claim. The duty to disclose all information known to be material to patentability is deemed to be satisfied if all information known to be material to patentability of any claim issued in a patent was cited by the Office or submitted to the Office in the manner prescribed by §§1.97(b)-(d) and 1.98. However, no patent will be granted on an application in connection with which fraud on the Office was practiced or attempted or the duty of disclosure was violated through bad faith or intentional misconduct. The Office encourages applicants to carefully examine:

(1) prior art cited in search reports of a foreign patent office in a counterpart application, and

(2) the closest information over which individuals associated with the filing or prosecution of a patent application believe any pending claim patentably defines, to make sure that any material information contained therein is disclosed to the Office.

(b) Under this section, information is material to patentability when it is not cumulative to information already of record or being made of record in the application, and

(1) It establishes, by itself or in combination with other information, a prima facie case of unpatentability of a claim; or

(2) It refutes, or is inconsistent with, a position the applicant takes in:

(i) Opposing an argument of unpatentability relied on by the Office, or

(ii) Asserting an argument of patentability.

A prima facie case of unpatentability is established when the information compels a conclusion that a claim is unpatentable under the preponderance of evidence, burden-of-proof standard, giving each term in the claim its broadest reasonable construction consistent with the specification, and before any consideration is given to evidence which may be submitted in an attempt to establish a contrary conclusion of patentability.

(c) Individuals associated with the filing or prosecution of a patent application within the meaning of this section are:

(1) Each inventor named in the application;

(2) Each attorney or agent who prepares or prosecutes the application; and

(3) Every other person who is substantively involved in the preparation or prosecution of the application and who is associated with the inventor, with the assignee or with anyone to whom there is an obligation to assign the application.

(d) Individuals other than the attorney, agent or inventor may comply with this section by disclosing information to the attorney, agent, or inventor.